


Key Features

- 40° x 40° coverage for long-range area
- Mid-range coverage for voice and music
- Sensitivity of 108 dB
- Recommended High-pass Filter



Reduced

... large area coverage ...

Specifications

System Performance	
Frequency Response (+/-3 dB) ¹	180 Hz - 16 kHz
Frequency Range (-10 dB) ¹	150 Hz - 18 kHz
Nominal Dispersion	40° H x 40° V
Sensitivity (S / 1 m)	108 dB S
Maximum S / 1 m ³	1 dB S (135 dB S peak)
Driver Type	Passive Bi-amp Speaker
Crossover Frequency	1.6 kHz
Recommended High-pass Filter	150 Hz 4th order filter (4 dB/octave)
Subwoofer	Required

⁴ Long-term Power Handling




440

i - ut ut id i uds ea er



ire ti ity dex a d

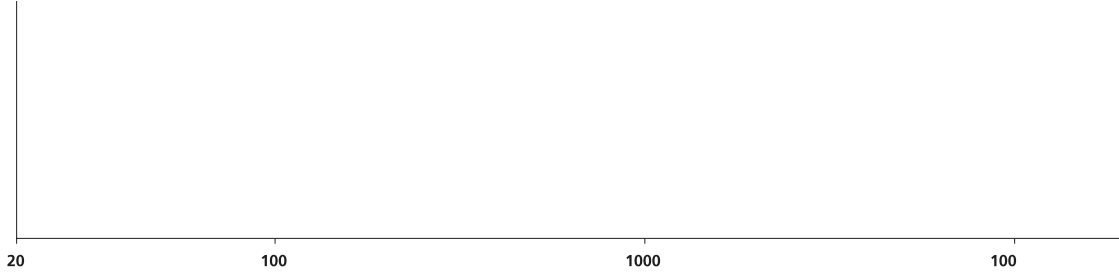


440

i - ut ut id i uds ea er



iri ia ra

Passive

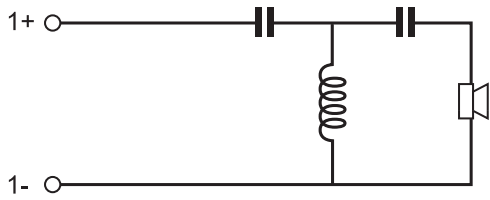


440

i - ut ut id i uds ea er



ri ta ts



LT 4402

□ se rofe onal e v on




r se

440

i - ut ut id i uds ea er



erti a ts



LT 4402





r ite ts a d i eers
e i i ati s

e - a g -fre ec lo ea er all co a a
 a rag co re o r vera o range
 a fol eac g o co r ver a
 ea-aco c a a e l e ra cer
 a large-for a avg o e
 a effc ve a er con ro a o a el o er al
 fre ve or co ver if all lo a ve or -
 a o era o
 -a e fre ec re o e all e o
 - reco e cro over a ac ve e al a o
 le e e v all e a a
 e ca a le of ro c y ea o of o a
 e er a ve e e a a le a o
 a lfer o e e o e cre fac or for
 o r a ave a o mal e ande o o -
 a o e e fre le ec o all a le a of
 a lfer o er a ave a o mal e a ce of o
 le e g -fre ec co a a le a of a lfer
 o er a ave a o mal e a ce of o
 e ra e o a le lo e all e co ce of vo -free
 e er or ra e a c ro c e e ve er al
 rac g e en clo ge er or all le ea o o ealer
 a e e er of f e a b- a ra ol re a e
 c a g e a e o ne vale rac g e en clo re all ro a e



Il for a o ec o c age o o ce
 Il ra e ar a e o e of e r e ec ve o er
 r se