


RoomMatch® 10 vertical DeltaQ™ array loudspeakers for installation




On-Axis Frequency Response

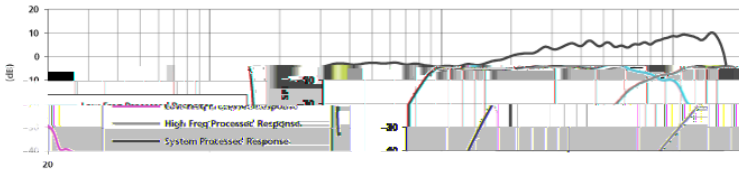


RM5510 measurements shown; other 10 modules similar

Beamwidth

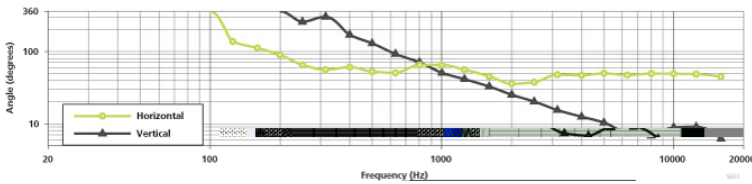

RM5510 measurements shown; other 10 modules similar

Mechanical Drawings

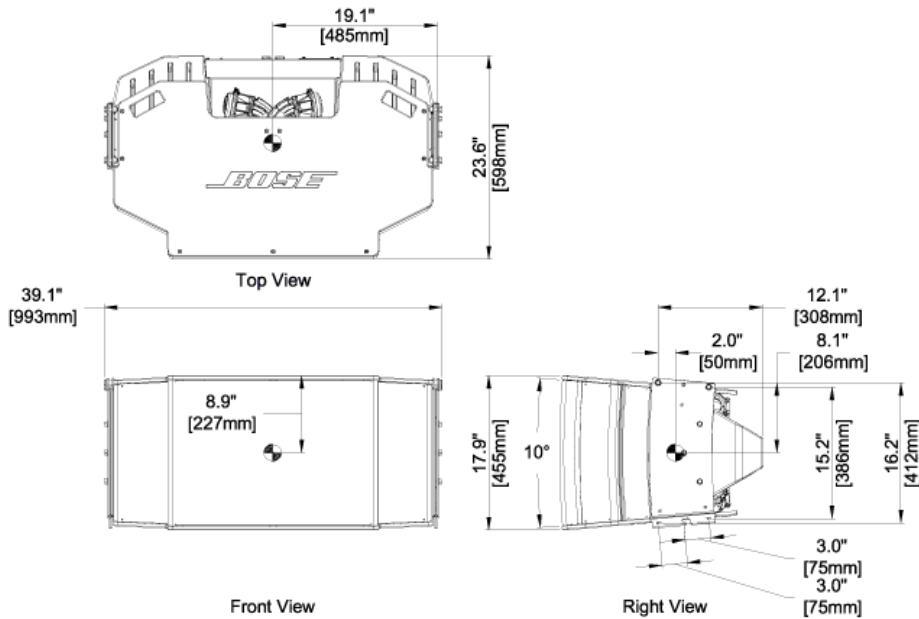

Footnotes

1. response and
2. Bose extended-lifecycle test: pink noise, IEC268-5 filtered, 6-dB crest factor, 100-hour duration, with recommended EQ.
- 3.
4. Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.

For additional specifications and application information, please visit pro.bose.com. Specifications subject to change without notice.