

RoomMatch® 5 vertical asymmetrical DeltaQ™ array loudspeakers for installation




Key Features

- **Bose EMB2 compression drivers** – deliver the vocal power normally associated with 3-way systems with frequencies from 500 Hz to

RoomMatch® 5 vertical asymmetrical DeltaQ™ array loudspeakers for installation




On-Axis Frequency Response

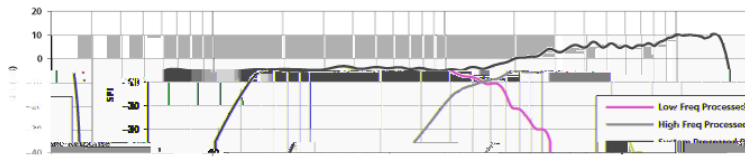


RM5505 measurements shown; other 5 modules similar

Beamwidth

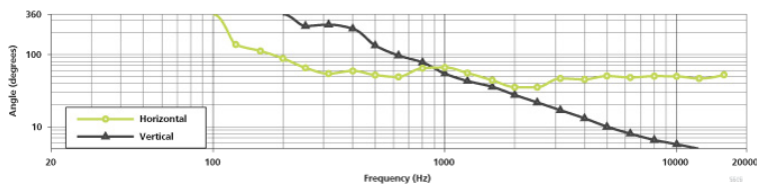

RM5505 measurements shown; other 5 modules similar

Mechanical Drawings

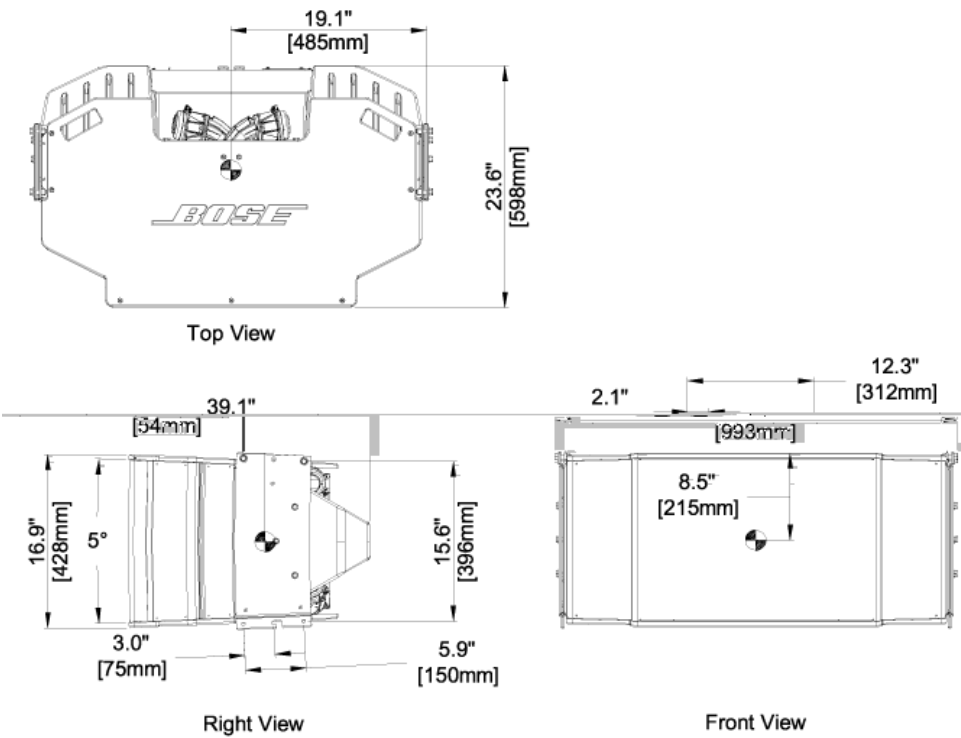

1. response and
2. Bose extended-lifecycle test: pink noise, IEC268-5 filtered, 6-dB crest factor, 100-hour duration, with recommended EQ.
- 3.
4. Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.

For additional specifications and application information, please visit pro.bose.com. Specifications subject to change without notice.