

HU

®

SHURE  
UA846Z2

GLX-D Frequency Manager

POWER

SHURE  
GLXD4R



SHURE  
GLXD4R




SHURE  
GLXD4R



SHURE  
GLXD4R



SHURE  
GLXD4R

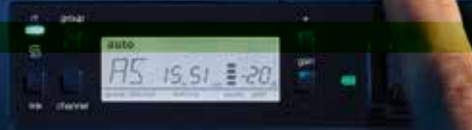

SHURE  
GLXD4R



GLX-D® ADVANCED





# GLX-D® Advanced

# GLX-D

## 1. GLX-D

- 
- 
- 2.4 GHz
- 

GLXD4R



## 2. GLX-D

- 
- 
- ( 11 )
- Advanced

9

GLX-D



**PA805Z2-RSMA**

- 8dB
- 2.4GHz
- 24dB



**UA505**

PA805Z2-RSMA UA8-Z2



**RSMA**

50 6 25 50 100

3.



GLX-D


4.

---

GLX-D

USB

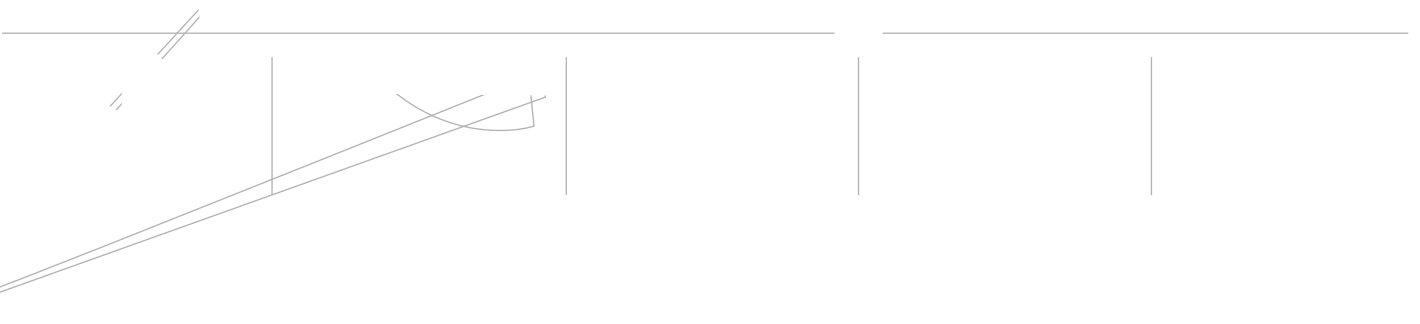

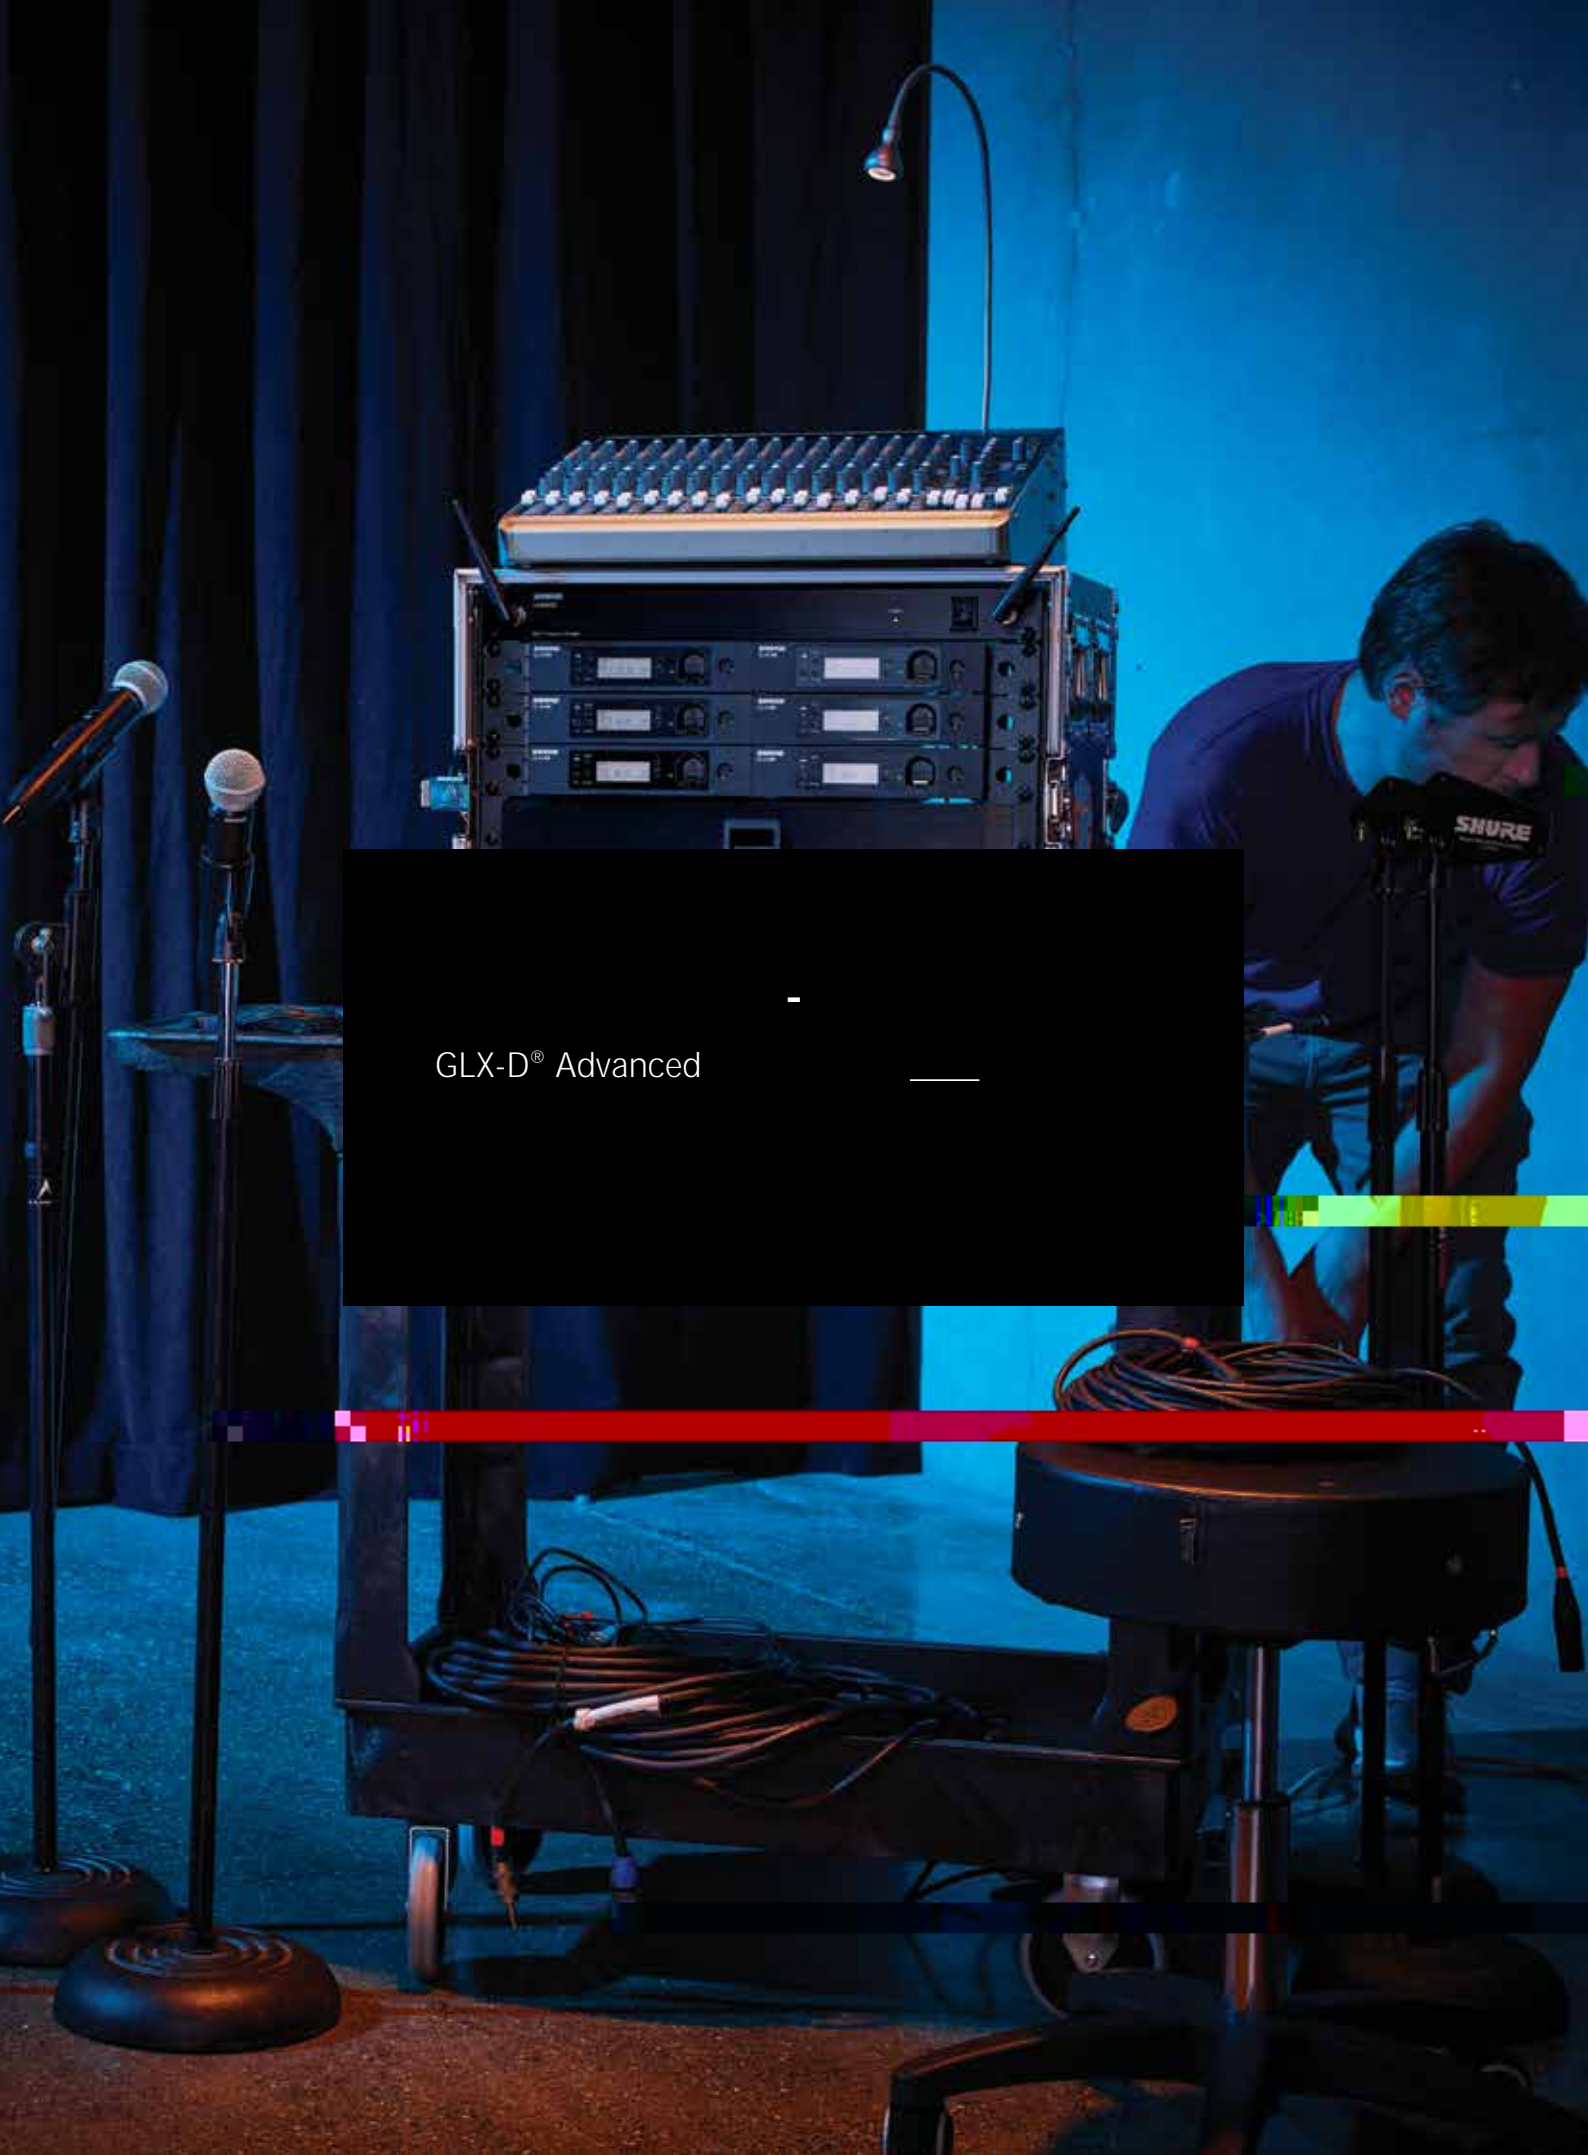

GLX-D® Advanced

	UA846Z2	GLXD4R	PA805Z2-RSMA
9 11	15 VDC	42 × 197 × 163 ( × × )	<2.1 (VSWR) 2050 2700 MHz
30 (100 ) 60 (200 ) 20 (65 ) 50 (165 )	15 VDC (× 6)	907.2	(2.45 GHz ) 8 dBi
GLX-D	-18 °C 63 °C(0 °F 145 °F)	14 18 VDC( )550 mA	<b>3 dB</b> 100
20 Hz – 20 kHz	45 × 483 × 192 ( × × )	>35 dB( )	(2.45 GHz ) 89%
120 dB A	1.63	-18 42 dB(1 dB )	50
1 /A 4.0 2 3 4 /B 7.3	SMA	/ 30 dB	(2.45 GHz ) 24 dB
-88 dBm( )	2400 2483.5 MHz	50	SMA
0.2%( )	35 dB( )	½	105 × 164 × 27.5 ( × × )
10 mW E.I.R.P.( )	50	-20 dBm	70
-18 °C (0 °F) 57 °C (135 °F)	-10 dBm		
-29 °C (-20 °F) 74 °C (165 °F)	+15 dBm		
( ) 3)	WA302 SMA 2400 2483.5 MHz (OIP3) 48 dBm( )		
16 /	50		
	35 dB( )		
	-3 0 dB		

		<b>6.35</b> (1/4 )
	100	100 (50 )
	+18 dBV -12 dBV	+12 dBV
	1= 2= 3=	= = =

GLXD1	GLXD2
90.4 × 64.5 × 22.9 ( × × )	(SM58) 252 × 51 ( × )
3.7 V	10 mW E.I.R.P.( ) 145 dB SPL
(1 kHz 1% )+ 8.4 dBV (7.5 Vp-p)	(SM58 ) 267
900 k	3.7 V
10 mW E.I.R.P.( )	
4 (TA4M)	



625 22  
info@shure.com.hk

618  
(II) 18 A  
info@shure.com.cn

1  
816