





ULX-D™



ULX-D



15 12



Workbench™ 6

Dante™

Wireless

ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



- 24-bit/48 kHz
- 20 Hz – 20 kHz
- 120 dB
- 60 dB
- 72 MHz
- 8 MHz
- 8 MHz
- 23
- 63
- AES 256
- Wireless Workbench 6
- AXT600 Axient®
- AMX/Crestron
- ½

- 1RU
- Dante




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

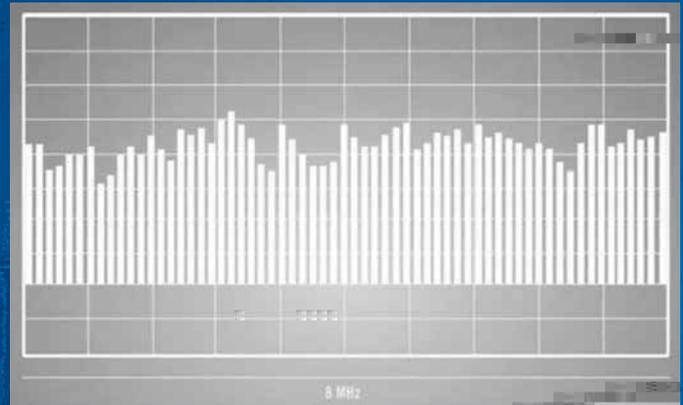

Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

-18°C (0°F) - 50°C (122°F)

ULXD4 42 x x
ULXD4 482 x 274 x 44